

TECHNICAL SPECIFICATION




Product name: **EXTREME 1.5**

Index **MAT-PUM-1,50-1,50-10**

EAN code **5906737990476**

Designed and dedicated especially for the NEXT STEP collection floors

The underlay can be used with other floors from the Barlinek offer as well as laminated floors.

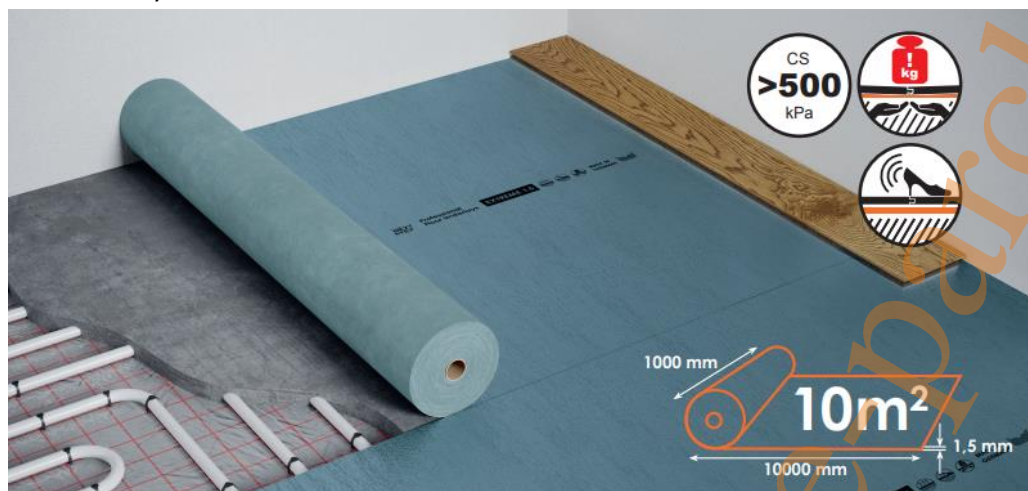

- ECO material - eco-non-woven fabric + PU / minerals + PET foil (up to 90% natural ingredients: rapeseed, ricin oil) and mineral fillers, it is ecological, recyclable and can be disposed of with the waste municipal).

- **Very high load resistance load - for rooms with heavy traffic,**
- **Improves acoustic comfort - high level of soundproofing of the floor in the room**
- **Very low thermal resistance - perfectly conducts heat**

TECHNICAL PARAMETERS :

• T - Thickness [mm]	1.5
• PC - Leveling out of localized uneven areas [mm]	~ 0,6
• AW - Density [kg/m ²]	1,5
• IS - Impact sound reduction [dB]	~ 16 *
• RWS - Radiated walking sound emission [%]	~ 22 *
• R – Thermal resistance [m ² K/W]	~ 0,009
• SD - Vapor barrier	ND
• CS – Static load / Protection of locking system and against cracking [kPa]	> 500
• RTF – Reaction to fire (hardly inflammable)	Bfl-S1

* measured under a 7mm laminate

LOGISTICS:

- Roll 10 000 mm x 1 000 mm
- Package :

- 33 pallets / TIR - 40 pcs. / pallet (height ca. 1000mm) ;

- 400m² / pallet = ok.600kg / pallet (net)

- 13 200m² / TIR = ok.19 800kg / TIR (net)

DISTRIBUTOR: BARLINEK S.A., Al. Solidarności 36, 25-323 Kielce, Poland

tel.: +48 41 333 11 11, fax: +48 41 333 00 00